

R LUM W

R LUM W luminaire is a wall indoor luminaire that offers optimal lighting, easy installation and low maintenance. Due to the minimalist design, it can easily be combined with other types of indoor lighting fixtures to create harmony in any given space.

	R LUM W
System efficacy	100 lm/W
Supply voltage	220-240 VAC 50/60 Hz
Power	8-10 W
Luminous flux	800-1,000 lm
Power factor	0.9
Weight	0,8 kg
CCT	4000K
CRI	> 80
Ingress protection	IP 44
Mechanical strength	IK03
UGR	< 19
SDCM	3
Operating temperature	-20 C° to +55 C°
Colour	White
Lifetime L80B10	50,000 h
Housing material	Polycarbonate
Warranty	5 years
Certificates	CE



System efficacy



LED module



Energy saving product



Supply voltage



Protection class



Long life



Low maintenance



Ready to use



Easy mounting



Recyclable materials



CE certificate


MAIN FEATURES

No flickering
Easy to install


APPLICATIONS

Toilets
Bathrooms

DIMENSIONS

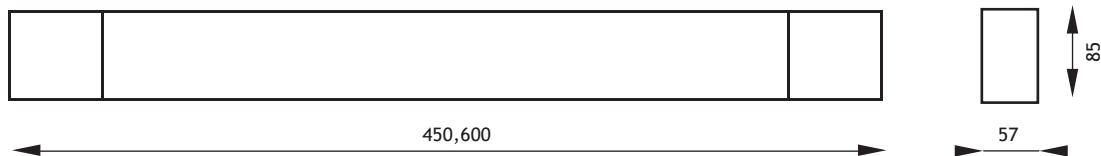

OPTIC

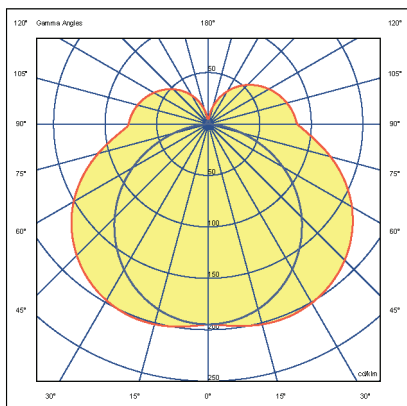

R LUM W: Installation for a clean room with distribution light lambert and low UGR index.

PRODUCT VARIATIONS

R LUM W

Article	Power [W]	Luminous flux [lm] *	Efficacy [lm/W]	Weight [Kg]
R LUM W 8.4000.450	8	800	100	0.6
R LUM W 10.4000.600	10	1000	100	0.6

*Luminous flux is valid for CCT 4000 K

The latest validated data is available at www.lumenia.com.