

D LUM GEN 4



**LUMENIA
INTERIOR**


D LUM GEN 4 luminaire is a stylish and powerful downlight, providing comfortable, quality illumination, with low UGR and easy installation. It is designed for public rooms and areas, stairways, corridors, foyers and shops.

	D LUM GEN 4			
Supply voltage	220-240 VAC			
System efficacy	136 lm/W	132 lm/W	135 lm/W	130 lm/W
Power	6 W	10 W	14 W	20 W
Luminous flux	816 lm	1320 lm	1890 lm	2600 lm
Weight	0.2 kg	0.3 kg	0.5 kg	0.8 kg
Power factor	> 0.9			
Lifetime L80B10	> 50,000 h			
CCT	4000 K; other upon request			
CRI	90			
Ingress protection	IP 44			
Operating temperature	-20 °C to +35 °C			
Remote control options	DALI (optional)			
Colour	White, Black			
Housing material	Aluminium			
Warranty	5 years			
Certificates	CE			




DIMENSIONS


Recessed mounting $\Phi 85 / 115 / 165 / 205$ mm

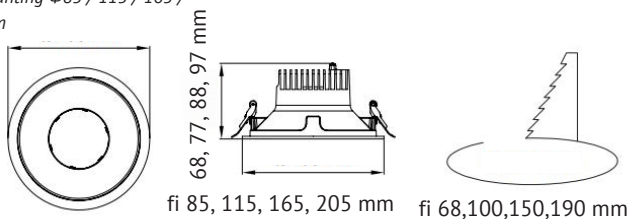

Surface mounting

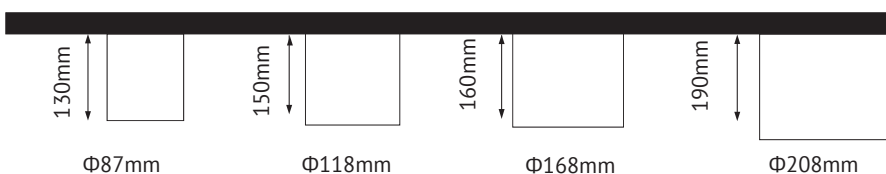

*Please refer to product installation manual for accurate installation instructions.

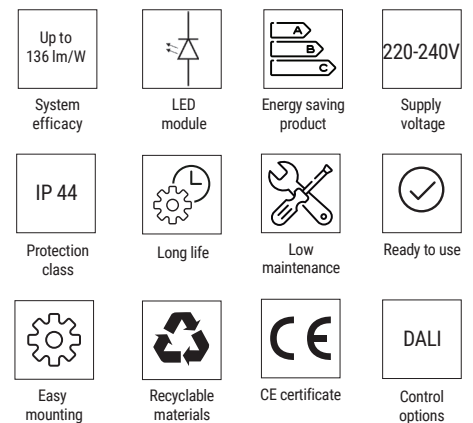


MAIN FEATURES

Aluminium housing
Easy to install
Low UGR (<19)
Recessed mounting

APPLICATIONS

Public rooms and areas
Stairways
Corridors
Foyers and shops

OPTIC

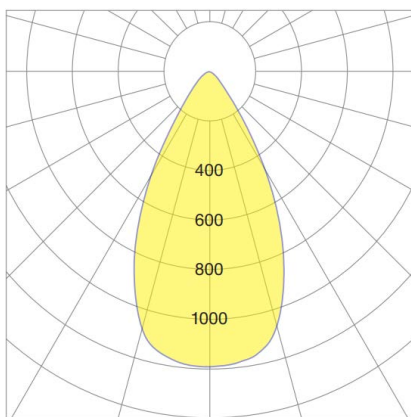

D LUM: Distribution of 80°

PRODUCT VARIATIONS

D LUM GEN 4

Article	Power [W]	Luminous flux [lm] *	Efficacy [lm/W]	Ingress protection
D LUM G4 6.4000.85.00.00	6	816	136	44
D LUM G4 10.4000.115.00.00	10	13320	132	44
D LUM G4 14.4000.165.00.00	14	1890	135	44
D LUM G4 20.4000.205.00.00	20	2600	130	44
D LUM G46.4000.85.10.00	6	816	136	44
D LUM G4 10.4000.115.10.00	10	1320	132	44
D LUM G4 14.4000.165.10.00	14	1890	135	44
D LUM G4 20.4000.205.10.00	20	2600	130	44
D LUM G46.4000.87.00.01	6	816	136	44
D LUM G4 10.4000.118.00.01	10	1320	132	44
D LUM G4 14.4000.168.00.01	14	1890	135	44
D LUM G4 20.4000.208.00.01	20	2580	129	44
D LUM G4 6.4000.87.10.01	6	816	136	44
D LUM G4 10.4000.118.10.01	10	1320	132	44
D LUM G4 14.4000.168.10.01	14	1890	135	44
D LUM G4 20.4000.208.10.01	20	2600	130	44

*Luminous flux is valid for CCT 4000 K

The latest validated data is available at www.lumenia.com.

LEGEND

	Abbreviation	Description
Luminaire	D LUM	D LUM GEN 4
Power	6,10,14,20	6 W, 10 W, 14 W, 20 W
CCT	4000	4000 K
Diameter	85, 115, 165, 205	Recessed: 68, 77, 88, 97 mm
	87, 118, 168, 208	Surface: 130, 150, 160, 190 mm
Remote control options	00	/
	01	DALI
Type	00	Recessed
	01	Surface