

# D LUM



LUMENIA  
INTERIOR

D LUM LED luminaire is a stylish and powerful downlight, providing comfortable, quality illumination, with low UGR and easy installation. It is designed for public rooms and areas, stairways, corridors, foyers, and shops.



	D LUM
System efficacy	Up to 93 lm/W
Supply voltage	220-240 VAC
Power	15 - 45 W
Luminous flux	1,200 - 4,185 lm
Power factor	>0.9
Weight	0.5 - 1.0 kg
CCT	4,000 K, other optional
CRI	80
Ingress protection	IP 20
Operating temperature	-20 °C to +35 °C
Colour (RAL)	RAL 9003
Housing material	Aluminium
Warranty	5 years
Certificates	CE

93 lm/W

System efficacy



LED module



Energy saving product

220-240V

Supply voltage

IP 65

Protection class



Long life



Low maintenance

Ready to use



Easy mounting



Recyclable materials



CE certificate


## MAIN FEATURES

Die cast aluminium housing  
Easy to install  
Low UGR

## APPLICATIONS


Public rooms and areas  
Stairways  
Corridors  
Foyers and shops

# DIMENSIONS

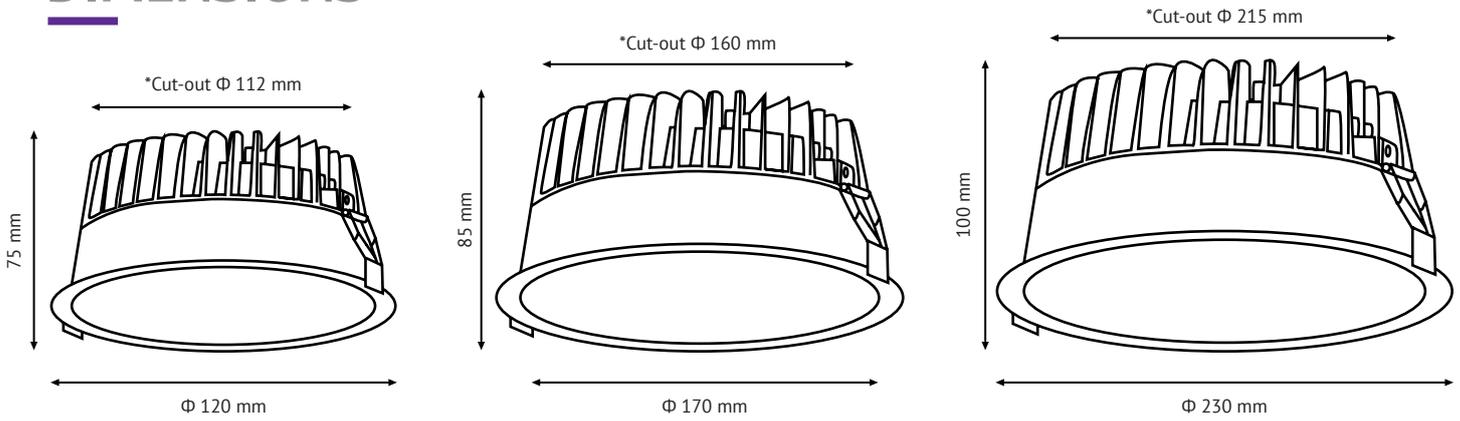

\*Please refer to product installation manual for accurate installation instructions.

# OPTIC

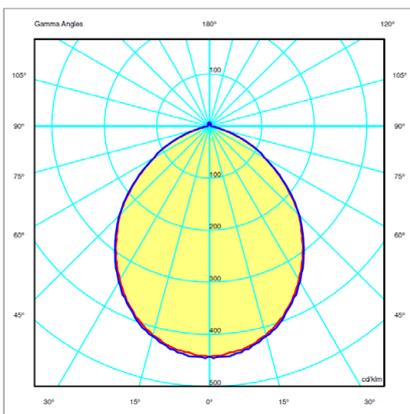

D LUM: Distribution of 90°

# PRODUCT VARIATIONS

Article	Power [W]	Luminous flux [lm] *	Efficacy [lm/W]	Forward current [mA]
D LUM 015.4000.120	15	1200	80	20
D LUM 025.4000.170	25	2300	92	20
D LUM 035.4000.230	35	3255	93	20
D LUM 045.4000.230	45	4185	93	20

\*Luminous flux is valid for CCT 4000 K

The latest validated data is available at [www.lumenia.com](http://www.lumenia.com).