

O LUM PANEL




**LUMENIA
INTERIOR**

Made of high quality materials, this luminaire is not only aesthetically pleasing, but also easy to install, offering a uniform and extremely harmonious lighting. It can easily be incorporated into any interior.



	O LUM PANEL	
Supply voltage	220-240 VAC 50 ÷ 60 Hz	
System efficacy	Up to 110 lm/W	Up to 100 lm/W
Power	40 W	40 W
Luminous flux	4,400 lm	4,000 lm
Ingress protection	IP 40	IP 65
UGR	<19	<22
Power factor	0.95	
Weight	2.5 kg	
Lifetime L80B10	50,000 h	
CCT	4,000 K	
CRI	> 80	
Operating temperature	-20 °C to +40 °C	
Remote control options	DALI (Optional)	
Colour	White	
Housing material	Aluminium, PMMA	
Mounting	Recessed, mounted on ceiling, hanging from ceiling	
Warranty	5 years	
Certificates	EN 55015:2013 + A1:2015; EN 61547:2009; EN 61000-3-2:2014; EN 61000-3-3:2013; EN 60598-2-2:2012; EN60598-1:2015 + A1:2018; EN 62493:2015, CE, RoHS	

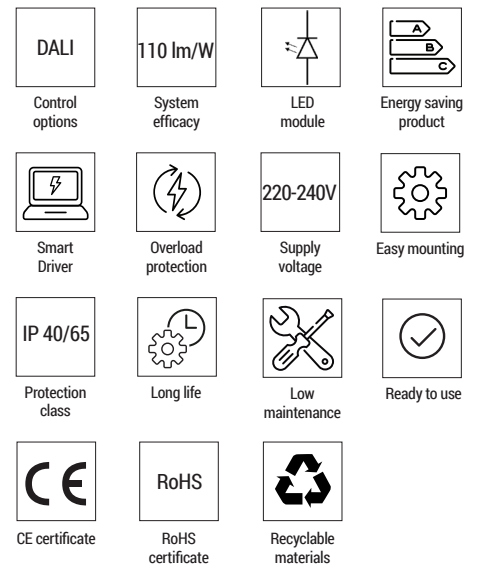

MAIN FEATURES

Energy efficacy up to 110 lm/W
No flicker
Optional Emergency Lights


APPLICATIONS

Offices
Utility rooms
Living rooms
Schools
Retail places
Meeting rooms


ACCESSORIES

Frame for surface installation

DIMENSIONS

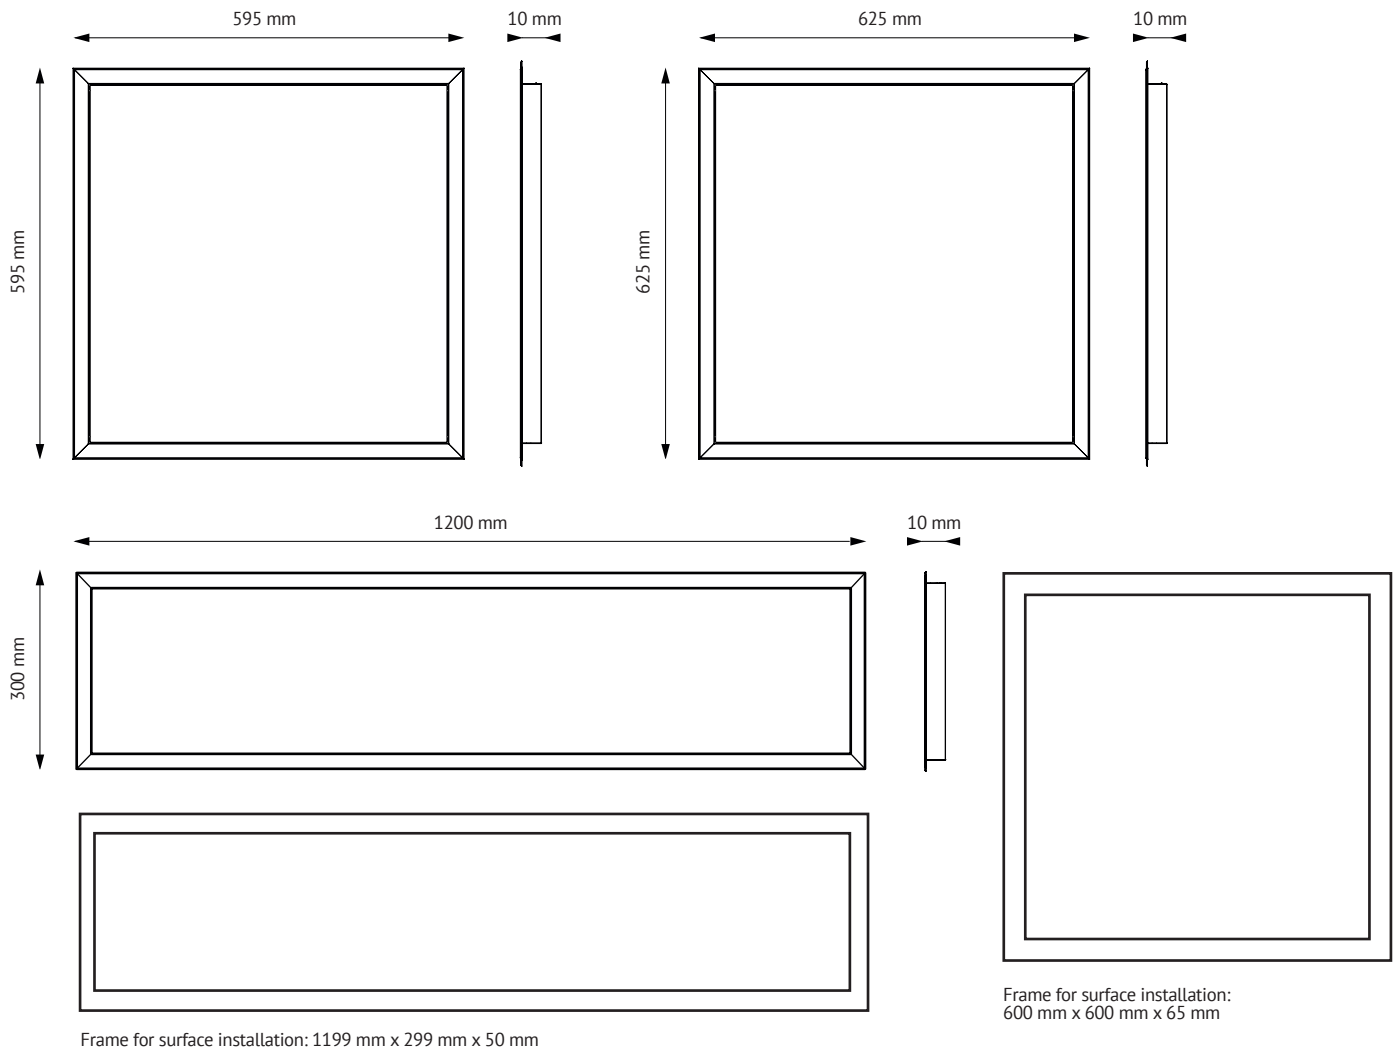

OPTIC

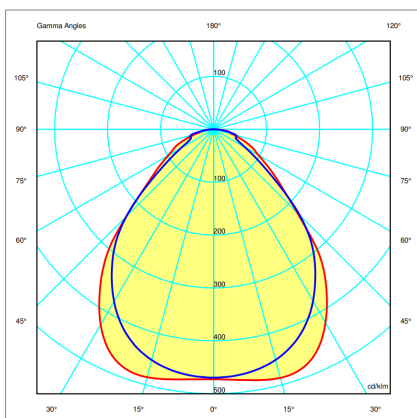

O LUM PANEL: Angular distribution of luminance.

PRODUCT VARIATIONS

Article	Power [W]	Luminous flux [lm]*	Efficacy [lm/W]	Ingress protection
PN.40.4000.596.IP65	40	4000	100	IP 65
PN.40.4400.596.IP40	40	4400	110	IP 40
PN.40.4400.120.30.IP40	40	4400	110	IP 40

*Luminous flux is valid for CCT 4000 K

The latest validated data is available at www.lumenia.com.